


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-180I	束线带S	GT-180I	180	3.6	44	18.2		

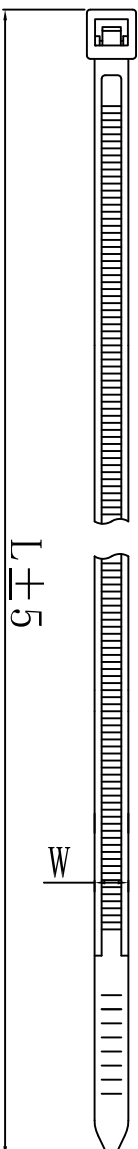

材质: 采用UL认证材料66, 额定电压94V-2, 阻燃,

耐潮湿, 绝缘性好, 不易老化, 承受力强。

温度: 可在85℃.

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION	TOLERANCES	0.0		±0.2	A	NEW PART	DWG. BY	CHK. BY	DATE	DWG. BY	CHK. BY	DATE	DWG. BY	UNIT	mm	
		0.00											DWG. BY	CHK. BY		DATE
FIRST ANGLE PROJ							<i>William</i>	<i>yan wang</i>	<i>2018</i>	<i>William</i>	<i>yan wang</i>	<i>2018</i>	<i>William</i>	REV.	A	HIWA/OR-JZ-31-HIWA-180I
													APP. BY			

未经授权不得修改和复印
该知识产权属于技术质量部