


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-120ST	束线带S	GT-120ST	120	4.8	24	22.2		

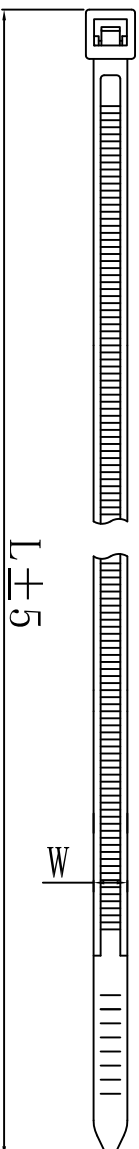

材质: 采用UL认证材料66, 额定电压94V-2, 阻燃,
耐酸碱, 绝缘性好, 不老化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION		TOLERANCES		LTR.		DATE	
0.0				A		2008	
0.00		±0.2					
FIRST ANGLE PROJ				NEW PART			
				REVISION RECORD			
				DWG. BY		CHK. BY	
				wulian		yq wang	
				DATE			
				DWG. BY		CHK. BY	
				wulian		yq wang	
				DATE		2008	
				APP. BY		DWG. NO.	
				wq wang		HIWA/OR-JZ-31-HIWA-120ST	
				CHK. BY		REV.	
				wulian		A	
				DWG. BY		UNIT	
				lin liang		mm	

未经并受权不得修改和复印
该知识产属于技术质量部

HIWA 惠州惠华电子科技有限公司