


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-530ST	束线带S	GT-530ST	530	4.8	140	22.2		

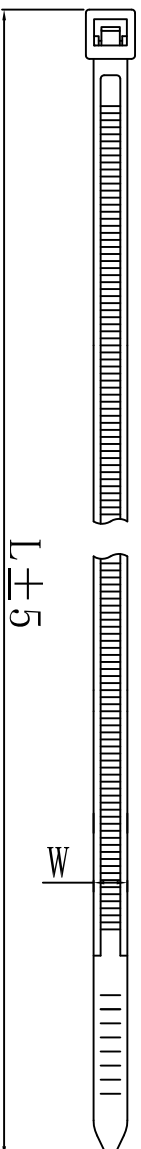

材质: 采用UL认证材料66, 防火等级94V-2, 阻燃,  
耐酸碱, 绝缘性好, 不老化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿  
无封洞, 无气泡



DIMENSION	TOLERANCES																	
0.0 0.00	±0.2																	
PRIST ANGLE PROJ																		
LTR.	A	NEW PART	<i>william</i>	<i>yu wang</i>	<i>2008</i>													
REVISION RECORD																		
DWG. BY																		
CHK. BY																		
DATE																		
DWG. BY	<i>Yu Liang</i>	UNIT	mm															
CHK. BY	<i>william</i>	REV.	A															
APP. BY	<i>wang ziyuan</i>	DWG. NO.	HIWA/OR-JZ-31-HIWA-530ST															

未经授权不得修改和复印  
该知识产权属于技术质量部

HIWA 惠华苏州惠华电子科技有限公司