


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-540HD	束线带S	GT-540HD	540	7.6	140	54.4		

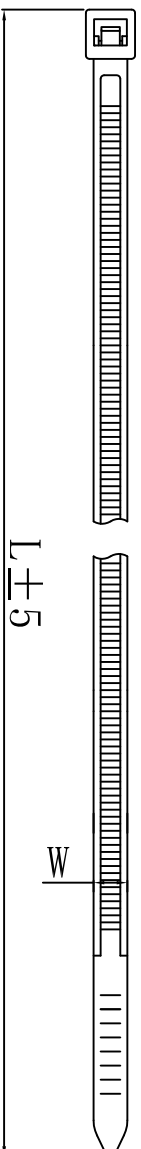

材质: 采用UL认证材料66, 额定电压94V-2, 阻燃,
耐酸碱, 绝缘性好, 不老化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION	TOLERANCES																	
	0.0 0.00	±0.2																
PRIST ANGLE PROJ																		
			A		NEW PART	<i>william</i>	<i>yan wang</i>	<i>2008</i>										
			LTR.		REVISION RECORD													
						DWG. BY	CHK. BY	DATE										
						DWG. BY	CHK. BY	DATE										
						DWG. BY	CHK. BY	DATE										
						CHK. BY	REV.											
						APP. BY	DWG. NO.											

未经并受权不得修改和复印
该知识产属于技术质量部

HIWA 惠华
苏州惠华电子科技有限公司