


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-760HDL	束线带S	GT-760HDL	760	9.0	225	79.4		

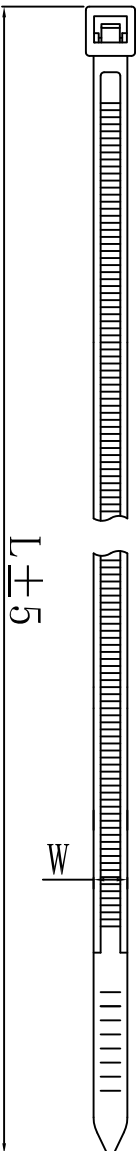

材质: 采用UL认证材料66, 防火等级94V-2, 阻燃,
耐腐蚀, 绝缘性好, 不变色化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION	TOLERANCES																	
0.0 0.00	±0.2																	
FRIST ANGLE PROJ																		
LTR.	A																	
REVISION RECORD	NEW PART																	
	<i>william</i>																	
DWG. BY	<i>yan wang</i>																	
CHK. BY	<i>yan wang</i>																	
DATE	<i>2008</i>																	
DWG. BY	<i>Lin Liang</i>	UNIT	mm															
CHK. BY	<i>william</i>	REV.	A															
APP. BY	<i>wang yanqian</i>	DWG. NO.	HIWA/QR-JZ-31-HIWA-760HDL															

未经并受权不得修改和复印
该知识产属于技术质量部

HIWA 惠华 苏州惠华电子科技有限公司