


Part NO.	Parts Name	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	Hole Diameter (mm)	Panel Thickness (mm)
GTRP-170ST	Push Mount Tie	170	4.8	38	22.2	6.4	~3.2

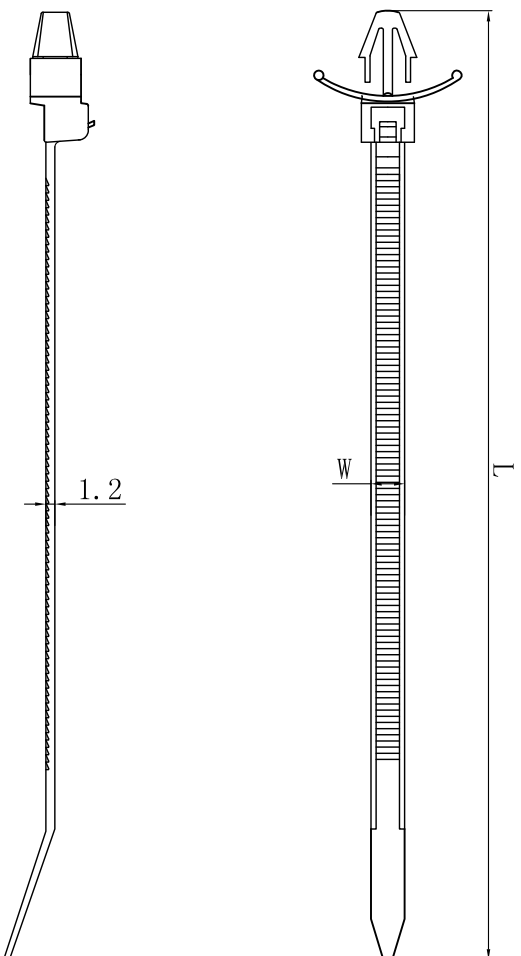

1. Material: Nylon (PA66)
2. UL Flammability: 94V-2
3. Color: Natural (All colors customized)
4. Application temperature: -25°C~85°C

Assembly process:

Step1:Drilling an appropriate hole diameter(6.4mm) on panel or board  
Step2:Inserting the mount tie head into the hole for assembly



DIMENSION	TOLERANCES	REVISION RECORD				DATE	DWG. BY	CHK. BY	APP. BY	DWG. NO.	UNIT	mm
		A	NEW PART	DATE	DATE							
0.0	±0.30											
0.00												
FIRST ANGLE PROJ		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE						