
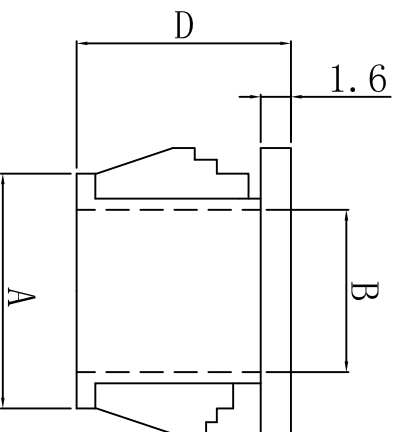


料号 Part NO.	品名 Parts Name	型号 Part NO.	铁板孔径 mounting hold A (mm)	内径 inside diameter B (mm)	覆盖 head diameter C (mm)	高度 height D (mm)	相关认证
27-1216C	扣式护线套	1216C	15.5-16	12.9	18.3	10.5	

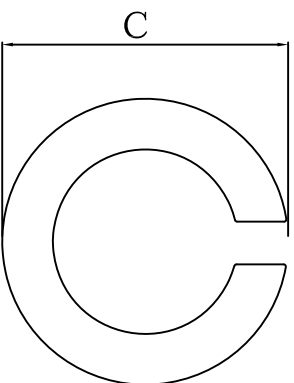

材质：符合UL94-2要求的尼龙66；  
用途：使粗劣的铁孔变成圆滑的出线孔，各种电线电缆之保护及绝缘；  
用法：不需工具，只要用手轻轻一压，即可完成装配  
公差：±0.3mm

DIMENSION	TOLERANCES					DWG. BY	CHK. BY	DATE	UNIT
0.0	±0.30								mm
0.00									A
FRIST ANGLE PROJ		A	NEW PART	<i>william</i>	<i>zy. wang</i>	<i>2009108</i>			
		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE	APP. BY	DWG. NO.	HIWA/OR-JZ-27-1216C
							<i>william</i>	REV.	
							<i>zy. wang</i>	DWG. NO.	

未经许可不得修改和复印  
该知识产权属于技术质量部