


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	适用机 板孔径	适用机 板厚度
31-HIWA-1128-B	螺旋式头束线带	T128 黑	163	4.6	36	20.0	≈6.0	0.7-3



标准：采用UL认证线材66，耐火等级94V-2、阻燃、耐摩擦、绝缘性好、不老化、承受力强。  
温度：可耐85℃。  
颜色：黑色；

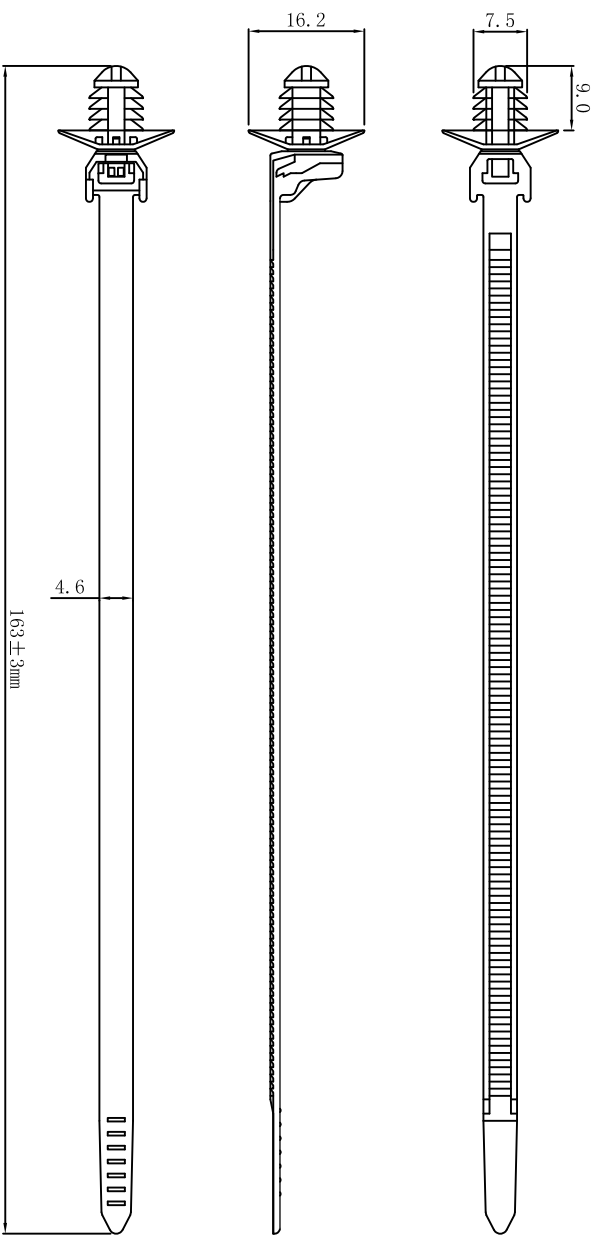

DIMENSION	TOLERANCES					DWG. BY	UNIT		
0.0 0.00	±0.5					<i>liu liang</i>	mm		
FIRST ANGLE PROJ		A	NEW PART	<i>william</i>	<i>zy wang</i>	<i>202108</i>	CHK. BY	REV.	DWG. NO.
		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE	<i>william</i>	A	HIWA/QR-JZ-31-HIWA-1128-B
							APP. BY		
							<i>wang zhiqian</i>		

未经并受权不得修改和复印  
该知识产权属于技术质量部

HIWA 苏州惠华电子科技有限公司