


Material no	Parts Name	Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	Suitable machine plate aperture	The thickness of the plate
31-HIWA-RQX-210L-B	Screw head cable ties	RQX-210L	210	5.5	45	22.2	6.5	1.2-2.0



Material: the UL nylon 66, fire rating 94 v - 2, acid, corrosion resistance, good insulation, unfavorable and ageing, for strength,
 Temperature: 85 ℃
 Color: black;

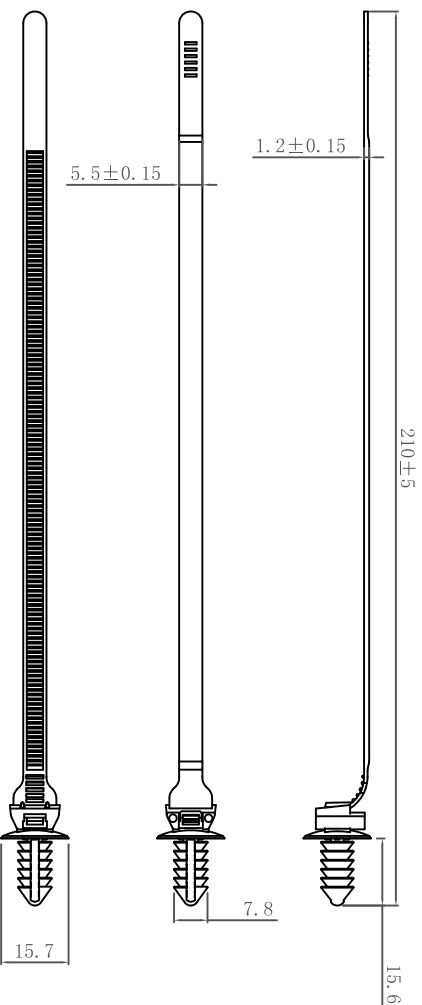

DIMENSION	TOLERANCES								
0.0	±0.5								
0.00									
FIRST ANGLE PROJ		A	NEW PART	<i>william</i>	<i>zy wang</i>	<i>202108</i>	DWG. BY	CHK. BY	DATE
L.T.R.			REVISION RECORD						
DWG. BY		CHK. BY		DATE		APP. BY		DWG. NO.	
<i>lin liang</i>		<i>william</i>		<i>202108</i>		<i>wang zhiyan</i>		HIWA/QR-JZ-31-HIWA-RQX-210L-B	
UNIT		REV.		DATE		DWG. NO.		HIWA/QR-JZ-31-HIWA-RQX-210L-B	
mm		A							