
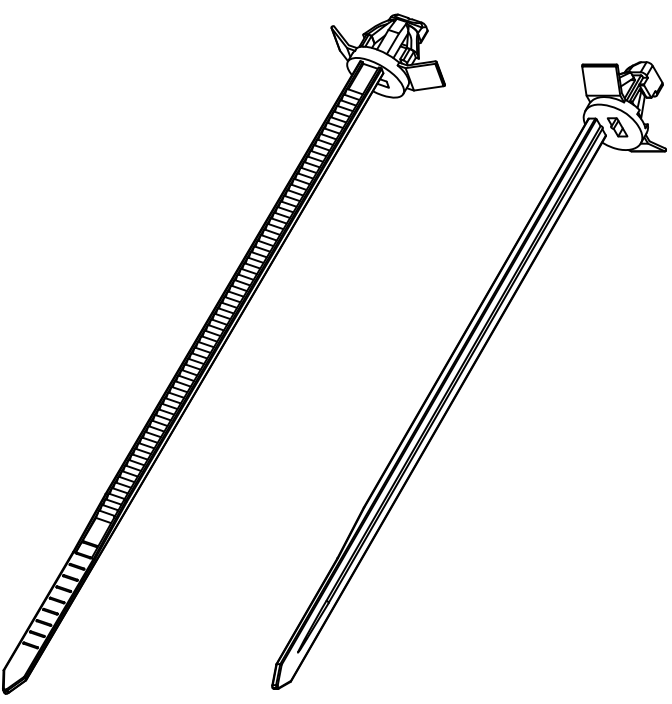


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	包装 packing	机板 孔径
31-E25-039	插销式束线带	GTP-1201灰 (TYPE2)	121.5	3.4	25	12	1000PCS/BAG	φ6.4

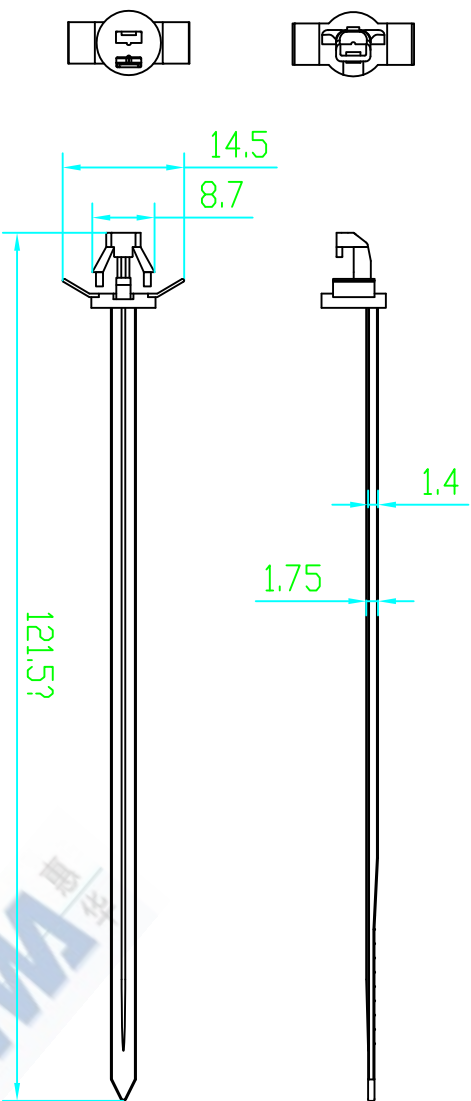

材质: 采用UL认证材料66, 耐火等级94V-2、阻燃

耐腐蚀、绝缘性好、不易老化、承受力强。

温度: 可达80℃

颜色: 浅灰色;

注: 此款为插销可退式反齿束线带, 头部回穿, 剪断后插入机板即可;



DIMENSION	TOLERANCES	NEW PART		CHK. BY		DATE	
0.0 0.00	±0.3	A		<i>wallian</i>	<i>ya wang</i>	<i>2016/08</i>	
FRIST ANGLE PROJ		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE	
DWG. BY	<i>lin liang</i>	UNIT	mm	APP. BY	<i>wang zhiyan</i>	DWG. NO.	HIMA/OR-JZ-31-E25-039
CHK. BY	<i>wallian</i>	REV.	A				

未经并受权不得修改和复印
该知识产权属于技术质量部

HIMA 惠华 苏州惠华电子科技有限公司