




料号 Part NO.	品名 Parts Name	规格
41-F01-PC302	灯具连接器	PC302

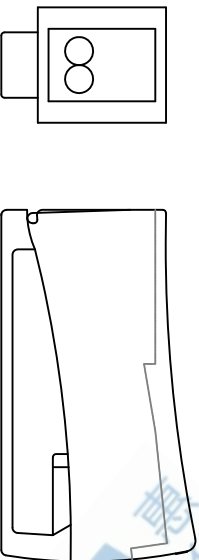

Housing Material: Polyamide 66, grey and white flame-retardant to UL 94V-2  
 Current: 30A (UL), 24A (VDE)  
 Voltage: 600V (UL), 450V (VDE)  
 Working Temp: 100°C  
 Wire Range: Installation side: 0.75-2.5mm<sup>2</sup>, sol, #18-#16 AWG, Sol  
 Lighting side: 0.5-2.5mm<sup>2</sup>, sol/Str, #18-#16 AWG, Sol/Str Cu  
 Stripping Length: 9-11mm (0.35-0.43inch)

DIMENSION		TOLERANCES									
.0		±0.3									
FIRST ANGLE PROJ		A		NEW PART		DWG. BY		CHK. BY		DATE	
		LTR.		REVISION RECORD		wang zhiyan		yq. wang		2024/10	
DWG. BY		CHK. BY		APP. BY		UNIT		REV.		mm	
liu liang		sullivan		wang zhiyan		REV.		A		HIWA/QR-1Z-41-F01-PC302	



未经受权不得修改和复印  
 该知识产权属于技术质量部;