


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	包装 packing	相关认证
31-HIWA-GT-750HD	束线带S	GT-750HD	750	7.6	218	54.4		

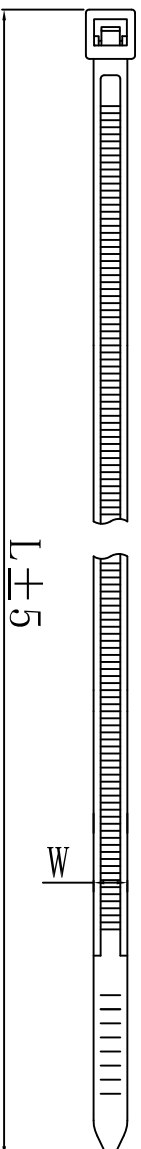

材质: 采用UL认证材料66, 额定电压94V-2, 耐酸、耐碱、绝缘性好, 不老化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION	TOLERANCES	REVISION RECORD				DATE	DWG. BY	CHK. BY	APP. BY	DWG. NO.
		LTR.	NEW PART	DWG. BY	CHK. BY					
0.0 0.00	± 0.2	A	NEW PART	<i>william</i>	<i>yu wang</i>	2008				
FIRST ANGLE PROJ										
DWG. BY	<i>Lin Liang</i>	UNIT	mm							
CHK. BY	<i>william</i>	REV.	A							
APP. BY	<i>wang ziyuan</i>	DWG. NO.	HIWA/OR-JZ-31-HIWA-750HD							

未经并受权不得修改和复印
该知识产属于技术质量部

HIWA 惠华 苏州惠华电子科技有限公司